




## LOOPED WIRE SPECIFICATIONS

<b>FLAT TOP</b>	<b>28-F</b>	<b>32-F</b>	<b>39-F</b>
Wire Width	.092	.105	.129
Wire Height	.150	.170	.209
Support Spacing	2.750	2.750	2.750
Support Diameter	.375	.375	.375
Standard Openings			
mm	.1 - 1.5	.2 - 1.5	.5 - 3.0
inches	.005 - .060	.010 - .060	.020 - .120
Overall Height			
mm	16.67	18.65	20.24
inches	.656	.734	.797

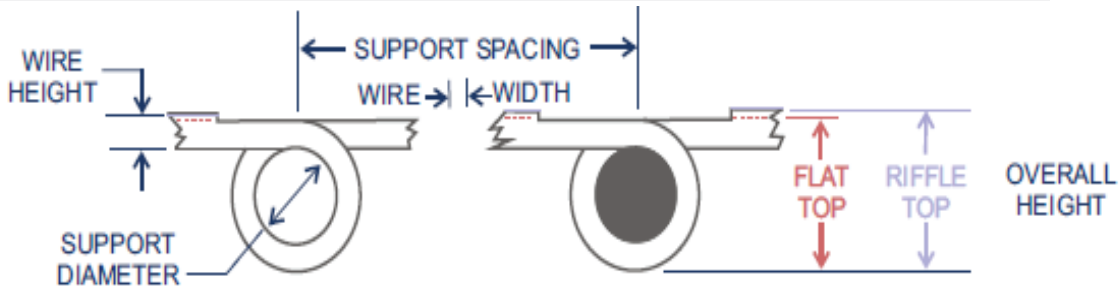

<b>RIFFLE TOP</b>	<b>28-R</b>	<b>32-R</b>	<b>39-R</b>
Wire Width	.092	.105	.129
Wire Height	.173	.193	.232
Support Spacing	2.750	2.750	2.750
Support Diameter	.375	.375	.375
Standard Openings			
mm	.1 - 1.5	.2 - 1.5	.5 - 3.0
inches	.005 - .060	.010 - .060	.020 - .120
Overall Height			
mm	17.25	19.23	20.82
inches	.679	.757	.820