


LOOPED WIRE SPECIFICATIONS

FLAT TOP	23-F	28-F	32-F	39-F
Wire Width	.076	.092	.105	.129
Wire Height	.121	.150	.170	.209
Support Spacing	2.750	2.750	2.750	2.750
Support Diameter	.375	.375 OR .500	.375 OR .500	.375 OR .500
Standard Openings				
mm	.1 - 1.0	.1 - 1.5	.2 - 1.5	.5 - 3.0
inches	.005 - .040	.005 - .060	.010 - .060	.020 - .120
Overall Height				
mm	16.27	16.67	18.65	20.24
inches	.641	.656	.734	.797

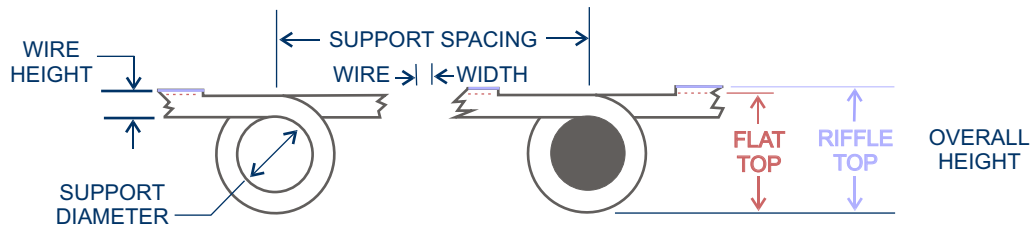

RIFFLE TOP	23-R	28-R	32-R	39-R
Wire Width	.076	.092	.105	.129
Wire Height	.144	.173	.193	.232
Support Spacing	2.750	2.750	2.750	2.750
Support Diameter	.375	.375 OR .500	.375 OR .500	.375 OR .500
Standard Openings				
mm	.1 - 1.0	.1 - 1.5	.2 - 1.5	.5 - 3.0
inches	.005 - .040	.005 - .060	.010 - .060	.020 - .120
Overall Height				
mm	16.88	17.25	19.23	20.82
inches	.664	.679	.757	.820